


# 11.5kW 3-Phase Basic PDU - 45 208-240V Outlets (36 C13, 9 C19), IEC 309 16/20A Red 360-415V Input, 6 ft. Cord, 70 in. 0U, TAA

MODEL NUMBER: PDU3XV6G20

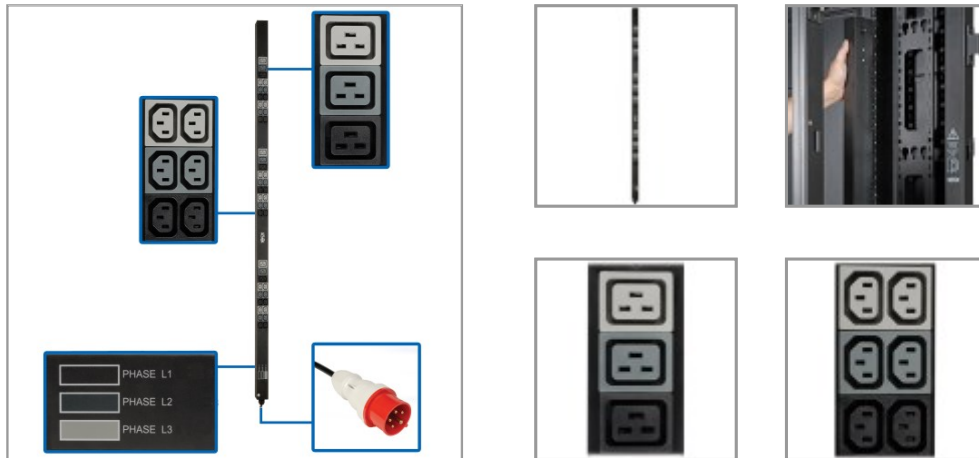

Delivers 208V-240V single-phase AC power to multiple loads from a utility outlet, generator or UPS system in a data center or network closet.

## Features

### 3-Phase 360-415V input / 208V-240V output PDU Distributes Network-Grade Power to Multiple Loads

This basic PDU is an ideal no-frills unit for networking, telecom, security, audio/video and sound reinforcement applications. Recommended for small to mid-sized data centers, computer rooms and network closets, the PDU3XV6G20 features 36 C13 and six C19 (208-240V) outlets in three single-phase output load banks for connecting equipment. A six-foot (1.8-meter) cord with IEC 309 16/20A Red 360-415V (3P+N+E) 3-phase input plug connects to your facility's AC power source, generator or protected UPS system to distribute power to connected loads.

### Easy to Install Vertically in an EIA-Standard 19 in. Rack

The 70-inch 0U PDU's all-metal housing mounts vertically using the pre-installed toolless mounting buttons or the included brackets. Spare buttons are also included. Use the included PDUMVROTATEBRKT kit to install the PDU with outlets facing the rear for better airflow or equipment access. Cable retention brackets keep power cords organized and your rack free of clutter. The PDU's switchless design helps prevent an accidental shutdown, which could lead to costly downtime.

### TAA-Compliant for GSA Schedule Purchases

The PDU3XV6G20 is compliant with the Federal Trade Agreements Act (TAA), which makes it eligible for GSA (General Services Administration) Schedule and other federal procurement contracts.

## Specifications

OVERVIEW	
UPC Code	037332255679
PDU Type	Basic

## Highlights

- Ideal no-frills PDU for telecom, security, audio/video and other network applications
- 36 C13 and 6 C19 single-phase outlets distribute AC power to connected equipment
- Switchless design helps prevent accidental shutdowns that can lead to costly downtime
- 6 ft. power cord with IEC 309 16/20A Red 3-phase input connects to AC source
- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

## Applications

Deliver network-grade power to high-density equipment in networking, telecom, security, audio/video and sound reinforcement applications

## Package Includes

- PDU3XV6G20 11.5kW 208V-240V 3-Phase Basic PDU
- Cable retention brackets with installation hardware
- Rack-mounting hardware
- Owner's manual



<b>INPUT</b>	
PDU Input Voltage	360; 380; 400; 415
Recommended Electrical Service	Three-phase 16A 360-415V service
Maximum Input Amps	16
Maximum Input Amps Details	Agency de-rated to 16A continuous
PDU Plug Type	IEC-309 16/20A RED (3P+N+E)
Input Phase	3-Phase
Input Cord Length (ft.)	6
Input Cord Length (m)	1.83
<b>OUTPUT</b>	
Output Capacity Details	11.5kW (415/240V), 11.1kW (400/230V), 10.5kW (380/220V), 10kW (360/208V) total capacity; 16A max per output phase (L1-L2, L2-L3, L3-L1); 16A max per C19 outlet; 12A max (10A CE) per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(36) C13; (9) C19
Output Nominal Voltage	208-240V
<b>SURGE / NOISE SUPPRESSION</b>	
Automatic Shut-Off	No
<b>PHYSICAL</b>	
Material of Construction	Metal
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / in.)	6.00 x 6.50 x 76.00
Shipping Weight (kg)	6.62
Unit Dimensions (hwd / in.)	70 x 2.2 x 1.93
Unit Dimensions (hwd / cm)	177.8 x 5.6 x 4.9
Unit Weight (lbs.)	9.00
Unit Weight (kg)	4.08
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	0C ~ 40C (32F ~ 104F)
Storage Temperature Range	-30°C to +50°C (-22°F to +122°F)
Relative Humidity	5-95% non-condensing
Operating Elevation (ft.)	0-10,000



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Operating Elevation (m)	0-3000
<b>STANDARDS &amp; COMPLIANCE</b>	
Product Certifications	CAN/CSA C22.2; UL 60950-1
Product Compliance	RoHS; CE (Europe); FCC Part 15 Class A (USA)
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>